



Established 1920

World's Oldest Manufacturer of Sportfishing Equipment

OUTRIGGERS • FIGHTING CHAIRS • ROD HOLDERS

RIGGING KIT INSTALLATION INSTRUCTIONS

TOOLS REQUIRED: Phillips Screwdriver, Electric or Cordless Drill, 3/32" Drill Bit, Lighter or Matches, Rag.

Step 1.

Carefully unroll the hank of line. With outrigger pole completely assembled, take end of line and thread through guide rings going from bottom to top. Bring end back to the bottom of the pole. Insert the pole in the holder with the guide rings pointing aft.

Step 2.

Tie a Small Snap to the end of the line. With matches or lighter, melt the end of line to prevent fraying. Have a rag handy to extinguish flame should the line begin to burn. Be careful not to let the melted nylon touch your skin. **IT WILL BURN!** Take a release clip and hook the snap to the top of it as shown in the drawing below. Make sure the tension mechanism of the Release Clip is at the top.


Step 3.

Fold line in half on hank end and thread it through the Glass Ring. Thread folded end of line through the lower ring of the Release Clip. This will be temporary. With one hand hold the line. With the

other hand, hold the Large Snap end of the Tension Cord. Move the Large Snap to determine your preferred Eye Strap mounting position. It may be mounted anywhere it is convenient aft of your holder. Normally, 1 foot behind the holder is a good position. Pick a position for easy access. If you plan to remove the outriggers when not in use consider mounting the Eye Strap underneath the gunnel. This will keep you gunnels clear.

Step 4.

Using screws provided, attach Eye Strap. Pre-drill mounting hole with 3/32" drill. This is to prevent cracking the gel-coat finish of your gunnel. Cut rigging line 1-2 feet longer than needed. Thread end through glass ring and bottom ring of the Release Clip. Place outrigger in the fishing position and create a light tension on the Tension Cord. Tie the line loosely to the Release Clip and raise the outrigger to the running position. Check the tension in both positions. If everything works properly, tie the line firmly to the Small Snap and melt the end. **GOOD FISHING!**

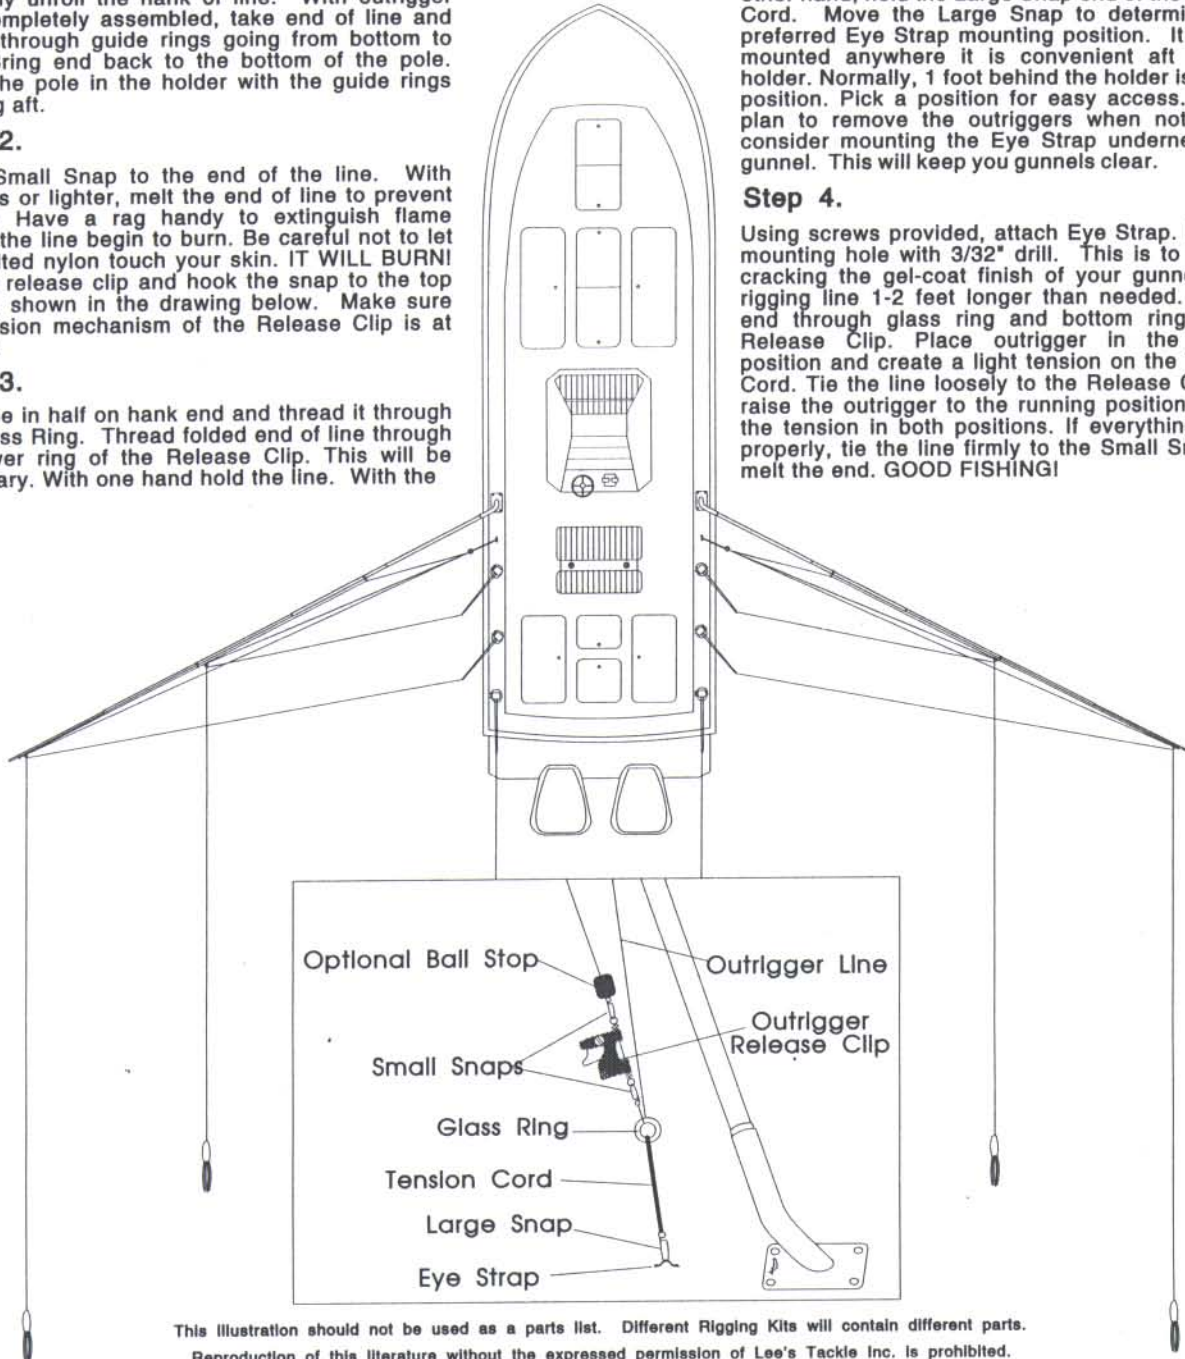

This illustration should not be used as a parts list. Different Rigging Kits will contain different parts. Reproduction of this literature without the expressed permission of Lee's Tackle Inc. is prohibited.

**PRECISION
SPORTFISHING
EQUIPMENT**



LEE'S TACKLE, INC.
8227 NW 54th STREET
MIAMI, FL 33166
(305) 599-9324
FAX (305) 599-0830